


# V-BLOCK ELECTROMAGNETS

## 24, & 110 VOLT DC CONTINUOUS DUTY CYCLE

Widely used in electric motor manufacturing and centerless grinding applications. 24 volt DC continuous duty V-block electromagnets are ruggedly built to withstand around-the-clock service. Other sizes and mounting configurations are available. Please contact one of our engineers for assistance.

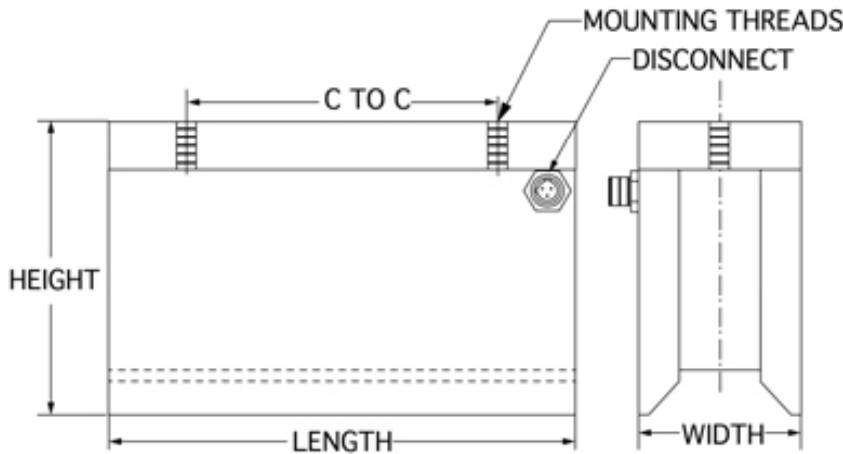

PRODUCT NUMBER	DIMENSIONS-(IN)			MOUNTING THREADS	C TO C	VDC	WATTS	CORD	WGT. (LBS)	POWER (LBS)
	WIDTH	LGTH.	HT.							
BPV-10020T-24C	1.0	2.0	2.75	1/4-20	1.00	24	5.0	T-STYLE	.50	40
BPV-10040M-24C	1.0	4.0	2.75	1/4-20	3.00	24	16	M-STYLE	1.5	180
BPV-10060M-24C	1.0	6.0	2.75	1/4-20	4.00	24	24	M-STYLE	2.0	240
BPV-10080M-24C	1.0	8.0	2.75	1/4-20	6.00	24	32	M-STYLE	2.0	300
BPV-10120M-24C	1.0	12.0	2.75	1/4-20	8.00	24	48	M-STYLE	2.0	440
BPV-15020T-24C	1.5	2.0	2.75	1/4-20	1.00	24	12	T-STYLE	1.0	85
BPV-15040M-24C	1.5	4.0	2.75	1/4-20	3.00	24	22	M-STYLE	1.5	210
BPV-15060M-24C	1.5	6.0	2.75	1/4-20	4.00	24	36	M-STYLE	2.0	260
BPV-15080M-24C	1.5	8.0	2.75	1/4-20	6.00	24	44	M-STYLE	4.0	310
BPV-15120M-110C	1.5	12.0	2.75	1/4-20	8.00	110	66	M-STYLE	6.0	510
BPV-20020M-24C	2.0	2.0	2.75	1/4-20	1.00	24	13	M-STYLE	1.5	105
BPV-20040M-24C	2.0	4.0	2.75	5/16-18	3.00	24	32	M-STYLE	4.0	470
BPV-20060M-24C	2.0	6.0	2.75	5/16-18	4.00	24	48	M-STYLE	5.0	620
BPV-20080M-24C	2.0	8.0	2.75	5/16-18	6.00	24	64	M-STYLE	8.0	940
BPV-20120M-110C	2.0	12.0	2.75	5/16-18	8.00	110	96	M-STYLE	12.0	1200