


BLUE & BROWN TO COIL BLACK IS NULL

SPECIFICATIONS				
CONTACT CARRIER MATERIAL	TPU OR NYLON			
MOLDED HEAD MATERIAL/COLOR	TPU/YELLOW			
CONTACT MATERIAL/PLATING	BRASS/GOLD			
COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL			
RATED CURRENT [A]	4.0 A			
RATED VOLTAGE [V]	250 V			
OUTER CABLE JACKET MATERIAL/COLOR	PVC/GRAY			
CONDUCTOR INSULATION MATERIAL	PVC			
NUMBER OF CONDUCTORS [AWG]	3x20 AWG			
TEMPERATURE RANGE	-40°C to +105°C (-40°F to +221°F)			
PROTECTION CLASS	NEMA 1,3,4,6P AND IEC IP68, IP69K			

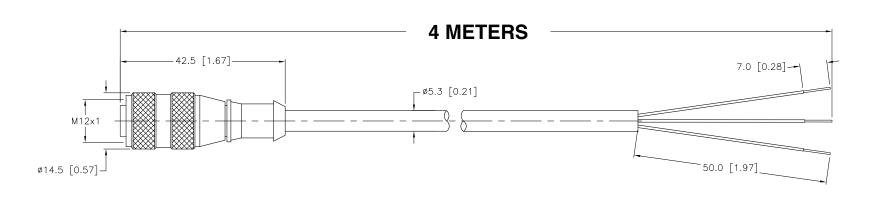

CABLE LENGTH	TOLERANCE				
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER				
STRIP LENGTH	TOLERANCE				
0-7mm	±0.5mm				
8-29mm	±1.0mm				
30-49mm	±2.0mm				
50-69mm	±3.0mm				
70-100mm	±4.0mm				
OVER 100mm	±5.0mm				

NOTES:

1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

RELATED DOCUMENTS	3RD ANGLE PROJECTION	THIS DRAWING IS			3000 CAMPUS	
1.	,	PROPERTY OF TURCK		kek ine	MINNEAPOLIS, MN 1-800-544-7	
3.	⊕ €	INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS	High Technology	(763) 553-7300 (763) 553-0708 fax		
4.	\(\sigma \)	PROHIBITED.			turck.com	
MATERIAL		DRFT JBJ	DATE 07/20/00	DESCRIPTION		
SEE SPECIFICATIONS ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY		APVD	SCALE 1=1.0	RK 4T-4		
		UNIT OF MEASUREMENT		IDENTIFICATION NO.		
FINISH	CONTACT TURCK	MILIMETE	ER[INCH]		•	I I
SEE SPECIFICATIONS	FOR MORE INFORMATION	IVIII LIIVIL I L	-11 [114011]	MCE-1530	9	H
		DO NOT SCALE	THIS DRAWING	FILE: 777000203	SHEET	1 OF 1

SOURCE DRAWING - FOR REFERENCE ONLY