


FEMALE END VIEW



- 1 = GREEN
- 2 = RED/BLACK
- 3 = RED/WHITE




**BLACK & WHITE TO VDC
GREEN IS GROUND**

SPECIFICATIONS

CONTACT CARRIER MATERIAL/COLOR	NYLON OR TPU/BLACK
MOLDED HEAD MATERIAL/COLOR	TPU/YELLOW
CONTACT MATERIAL/PLATING	BRASS/GOLD
COUPLING NUT/PLATING	BRASS/NICKEL
RATED CURRENT [A]	4.0 A
RATED VOLTAGE [V]	250 V
OUTER JACKET MATERIAL/COLOR	PVC/YELLOW
CONDUCTOR INSULATION MATERIAL	PVC
NUMBER OF CONDUCTORS [AWG]	3x22 AWG
TEMPERATURE RANGE	-40°C to +105°C (-40°F to +221°F)
PROTECTION CLASS	NEMA 1,3,4,6P AND IEC IP67, IP68, IP69K

6 METERS

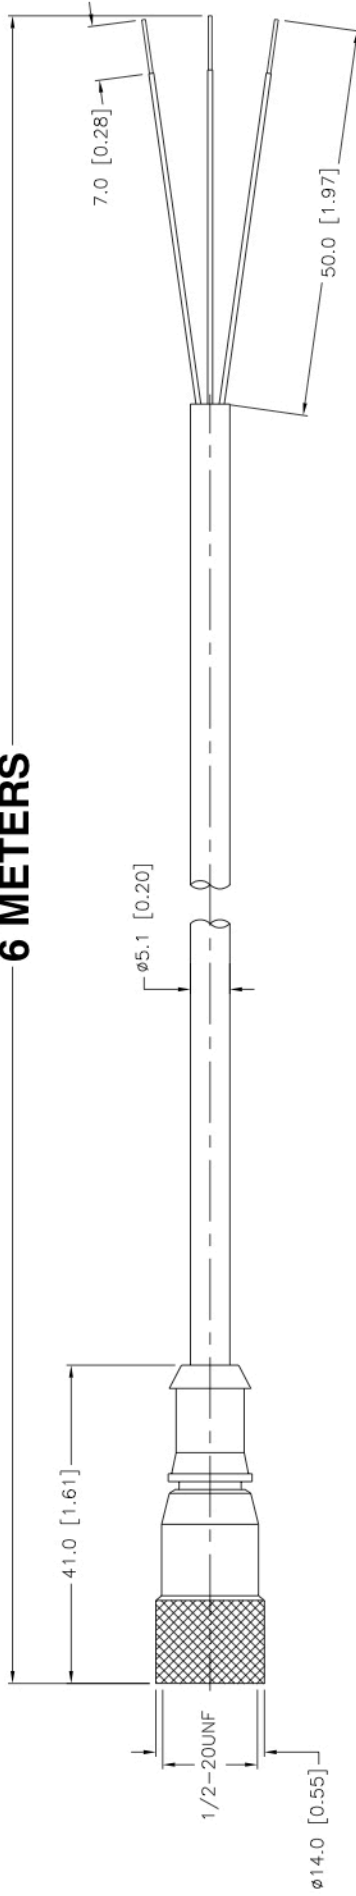

CABLE LENGTH	TOLERANCE
+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER	
STRIP LENGTH	TOLERANCE
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm

NOTES:

1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.
2. STRIP AND TIN LENGTHS ARE FOR REFERENCE ONLY; SOME LENGTHS MAY NOT BE STRIPPED AND TINNED.

SOURCE DRAWING - FOR REFERENCE ONLY

THIS DRAWING IS PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.	DRFT DSGN	JBU DATE 02/16/01	DESCRIPTION KB 3T-6
	UNIT OF MEASUREMENT MILLIMETER [INCH]		IDENTIFICATION NO. MCM-07885
RELATED DOCUMENTS 1. 2. 3. 4.	MATERIAL SEE SPECIFICATIONS	FINISH SEE SPECIFICATIONS	ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY CONTACT TURCK FOR MORE INFORMATION
3RD ANGLE PROJECTION 		DO NOT SCALE THIS DRAWING FILE: 777000598	

TURCK INC
 High Technology Sensors and Automation Controls
 3000 CAMPUS DRIVE
 MINNEAPOLIS, MN 55441
 1-800-544-7769
 (763) 553-7300
 (763) 553-0708 fax
 turck.com

REV	DESCRIPTION	DATE	BY	ECO NO.
D	DRAWING PROCESSED AS PART OF ECO 33971	04/06/11	CBM	33971
SHEET 1 OF 1				