



**GREEN IS GROUND
RED/BLACK & RED/
WHITE GO TO VDC**

SPECIFICATIONS	
CONTACT CARRIER MATERIAL/COLOR	NYLON/BLACK
MOLDED HEAD MATERIAL/COLOR	TPU/YELLOW
CONTACT MATERIAL/PLATING	BRASS/GOLD
COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL
RATED CURRENT [A]	4.0 A
RATED VOLTAGE [V]	250 V
OUTER JACKET MATERIAL/COLOR	TPU/YELLOW
CONDUCTOR INSULATION MATERIAL	PVC
NUMBER OF CONDUCTORS [AWG]	3x22 AWG
TEMPERATURE RANGE	-40°C to +80°C (-40°F to +176°F)
PROTECTION CLASS	NEMA 1,3,4,6P AND IEC IP67, IP68, IP69K

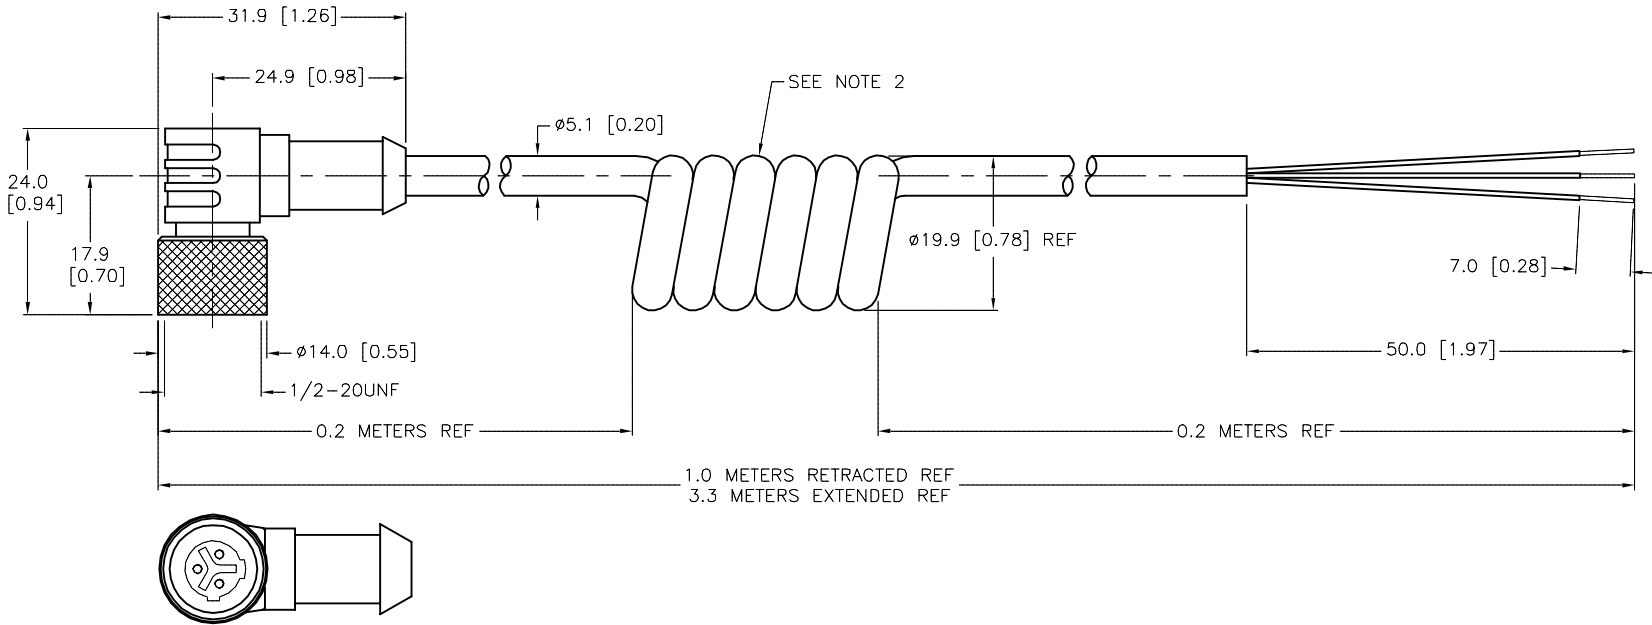

SOURCE DRAWING - FOR REFERENCE ONLY

- NOTES:
1. "/S90" DESIGNATES THERMOPLASTIC POLYURETHANE (TPU) CABLE.
 2. NUMBER OF COILS IS REFERENCE ONLY.

RELATED DOCUMENTS				3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax turck.com	
1. 2. 3. 4.				ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY		DRFT RWC DSGN		DATE 02/22/07 SCALE 1=1.0	
MATERIAL SEE SPECIFICATIONS				UNIT OF MEASUREMENT MILLIMETER [INCH]		DESCRIPTION WKB 3T-3.3/S90-SP		IDENTIFICATION NO. MCM-11956	
FINISH SEE SPECIFICATIONS				CONTACT TURCK FOR MORE INFORMATION		DO NOT SCALE THIS DRAWING		REV G	
G REMOVE PIGTAIL TOLERANCE				CK 01/20/11 33990		FILE: U2221		SHEET 1 OF 1	
REV DESCRIPTION				BY DATE ECO NO.					