


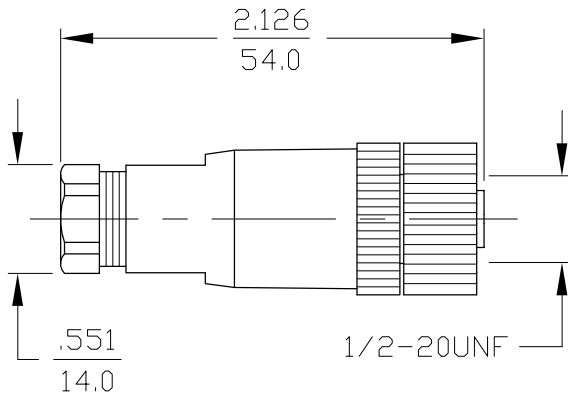



FEMALE CONNECTOR - END VIEW		SPECIFICATIONS	
 		HOUSING MATERIAL/PLATING	PBT/BLACK
		CONTACT MATERIAL/PLATING	NICKEL PLATED BRASS
		COUPLING NUT MATERIAL/PLATING	NICKEL PLATED BRASS
		RATED CURRENT [A]	4.0 A
		RATED VOLTAGE [V]	250 V
		MAXIMUM WIRE SIZE	18 AWG
		CABLE GRIP RANGE	4-6 mm
		TEMPERATURE RATING	-40°C to +85°C (-40°F to +185°F)
		PROTECTION CLASS	MEETS NEMA 1,3,4,6,13 AND IEC IP67
		SPACINGS [VDE 0110 b]	250 VAC/300 VDC, Gr. C



**2 & 3 TO VDC
1 IS GROUND**

<div>2 & 3 TO VDC 1 IS GROUND</div>					MATERIAL		3RD ANGLE PROJECTION		<div>TURCK INC</div> <div>3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 PHONE: (763) 553-7300</div>											
					FINISH															
					DRFT		SWC		DATE		9/1/95		PART NO./DESCR.							
					DSGN				Y#				MF 3131-0							
		DRAWING RELEASED		SWC		9/1/95				DIMENSION UNITS: INCHES [MILLIMETERS]			SIZE A	ID NO. MCM-15441		REV				
REV		DESCRIPTION		DRFT		DATE		ECO NO.												
REVISIONS														SCALE	NONE		MIC\U5590		SHEET	OF