

NOTES:


REV DESCRIPTION


UPDATE CABLE DIAMETER

BLUE AND BROWN TO COIL BLACK IS NULL

KMY 10/31/11

SPECIFICATIONS				
CONTACT CARRIER MATERIAL	NYLON OR TPU			
MOLDED HEAD MATERIAL/COLOR	TPU/YELLOW			
CONTACT MATERIAL/PLATING	BRASS/GOLD			
COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL			
RATED CURRENT [A]	4.0 A			
RATED VOLTAGE [V]	250 V			
OUTER CABLE JACKET MATERIAL/COLOR	PVC/YELLOW			
CONDUCTOR INSULATION MATERIAL	PVC			
NUMBER OF CONDUCTORS [AWG]	3x18 AWG			
TEMPERATURE RANGE	-40°C to +105°C (-40°F to +221°F)			
PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP68			

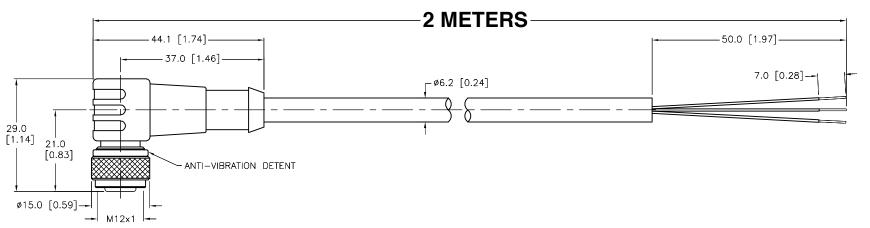



CABLE LENGTH	TOLERANCE*					
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER					
STRIP LENGTH	TOLERANCE *					
0-7mm	±0.5mm					
8-29mm	±1.0mm					
30-49mm	±2.0mm					
50-69mm	±3.0mm					
70-100mm	±4.0mm					
OVER 100mm	±5.0mm					
* UNLESS 01	* UNLESS OTHERWISE SPECIFIED					

SOURCE DRAWING - FOR REFERENCE ONLY

1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

	RELATED DOCUMENTS 1.	3RD ANGLE PROJECTION	THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK		MINNEA	CAMPUS DRIVE POLIS, MN 55441 00-544-7769	
	2. 3. 4.	\bigoplus	INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		(76	3) 553-7300 3) 553-0708 fax ww.turck.us	
	MATERIAL		DRFT JBJ	DATE 07/20/00			
			JDJ	0//20/00			
	SEE SPECIFICATIONS	ALL DIMENSIONS DISPLAYED ON THIS	APVD	SCALE 1=1.0	WKC 4T-2		
		DRAWING ARE FOR	UNIT OF ME	ASHDEMENT			
		REFERENCE ONLY	OIVII OI WIL	ASOREMENT	IDENTIFICATION NO.	REV	
	FINISH			[_	
		CONTACT TURCK FOR MORE	MILLIMETE	ER [INCH]	MCE-1530	8 F	
35730	SEE SPECIFICATIONS	INFORMATION				_ '	
ECO NO.	222 2: 231 10/11/01/0		DO NOT SCALE	THIS DRAWING	FILE: 777000709	SHEET 1 OF	